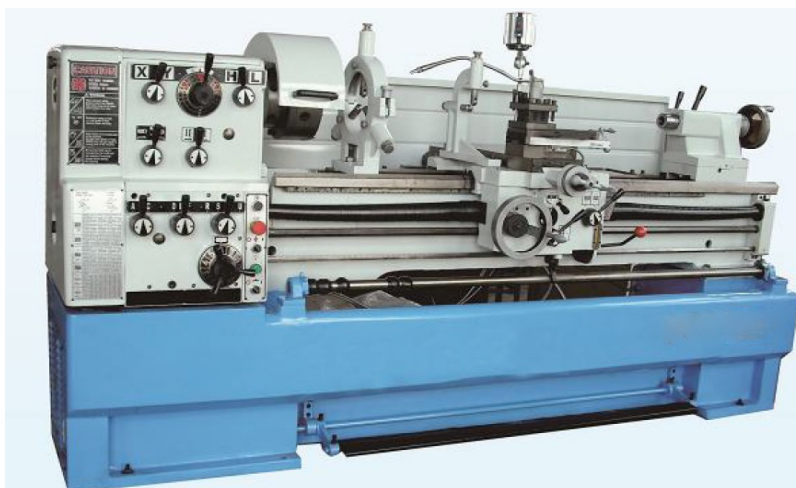


**DESCRIPTION:-**

- **Lathe machine 1000 with standard accessories:**
- machine stand , face plate, 3-jaw chuck, 4- jaw chuck, follow rest, steady rest, working light, foot brake, change gears set, coolant pump, splash guard, dead center, center sleeve, oil gun, tool box with tools
- 2-axis DRO
- Live center
- Drill chuck
- Lathe tools

SPECIFICATIONS:-

- Swing Over Bed 510mm
- Max. swing over cross slide 305mm
- Max. swing over gap 735mm
- Length of Gap 200mm
- Distance Between Centers 1000/1500/2000/3000mm
- Bed Width 350mm
- Spindle nose D1-8 or A1-8
- Spindle Bore 105mm
- Taper Of Spindle Bore MT7
- Spindle Speed 12changes 20-1600r/min
- Max .Travel of Cross Slide 280mm
- Leadscrew diameter & thread 40mm(19/16") × 4T.P.I or 6mm

Note: Specifications are subject to change, Photos shown above are Indicative, Actual Product can Vary.



Export Sales: +91-9829132777
India Sales: +91-9588842361



IT-2013, Ramchandrapura Industrial Area,
Sitapura Extension, Jaipur-302022, India.



info@tesca.in
www.tescaglobal.com

- Range of Inch Thread 2-112(60Nos)
- Range of Metric Thread 0.2-14(47Nos)
- Diametral pitches DP/DP 4-112D.P(50Nos)
- Module pitches MP/MP 0.1-7M.P(39Nos)
- Range of longitudinal feeds 0.0022-0.0612mm/rev (35Nos)
- Range of cross feeds 0.00048-0.01354mm/rev (35Nos)
- Total travel of Tailstock quill 180mm
- Tailstock quill $\phi 75$ mm
- Tailstock quill taper M.T.5
- Spindle drive motor 4P,3PH 7.5kW
- Coolant drive motor 2P,3PH 90W
- Packing Size 2400/2900/3400/4400 $\times$ 1150 $\times$ 1740mm
- Vol./Freq As customer's requirement

Note: Specifications are subject to change, Photos shown above are Indicative, Actual Product can Vary.



Export Sales: +91-9829132777
India Sales: +91-9588842361



IT-2013, Ramchandrapura Industrial Area,
Sitapura Extension, Jaipur-302022, India.



info@tesca.in
www.tescaglobal.com