



Touch Screen Operation



Precise Compressive Load Measurement



User Friendly Software

### Features:-

- Result directly saved in excel file.
- Graph also saved in excel file.
- Capable to save customers name, other details of customer ageing of cube moulds, identification mark of the cube mould, Date and time of the testing.
- Capable to print direct report from the computer.
- Capable to select different test parameters like pace rate, sample size and area from computer (software).
- Capable to select different type of tests, like flexural, CTM, aggregate crushing etc.
- Emergency stop button.

### Introduction:-

This is fully automatic concrete compression testing machine. Concrete test sample block will place between fixed and swelling platens and start the cycle. Force will apply on test sample gradually and it will brake.

Once test sample brakes its compressive strength will display on screen.

*Note: Specifications are subject to change, Photos shown above are Indicative, Actual Product can Vary.*



Export Sales: +91-9829132777  
 India Sales: +91-9588842361



IT-2013, Ramchandrapura Industrial Area,  
 Sitapura Extension, Jaipur-302022, India.




info@tesca.in  
 www.tescaglobal.com



**Construction :**

- Heavy duty spherical seat, allowing initial free alignment at the initial contact with the specimen and automatic jamming up to the end of test.
- Surface hardness of platen is 55 HRC, flatness tolerance 0.03mm. Traceable certificate of surface hardness available on request.
- Piston travel limit switch (extra cost).
- Safety door mode of GI sheet with acrylic window.

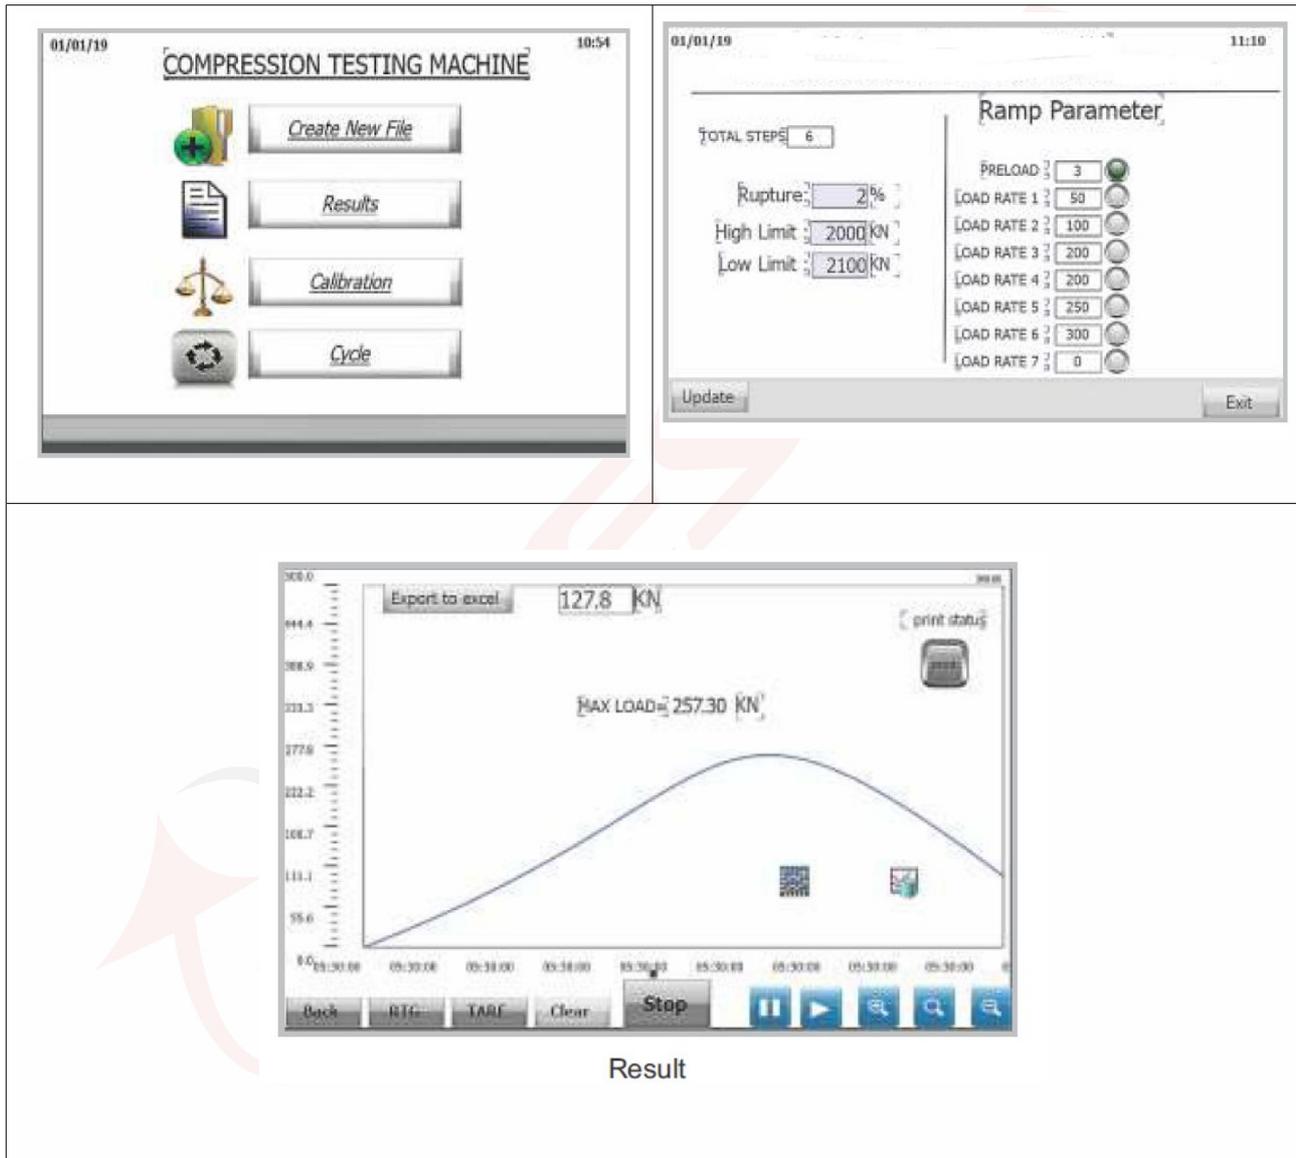

Note: Specifications are subject to change, Photos shown above are Indicative, Actual Product can Vary.



Export Sales: +91-9829132777  
 India Sales: +91-9588842361



IT-2013, Ramchandrapura Industrial Area,  
 Sitapura Extension, Jaipur-302022, India.



info@tesca.in  
 www.tescaglobal.com




**SPECIFICATIONS:-**

Max. Capacity	3000 kN
Upper & Lower Compression Plates	Ø300 mm
Horizontal Clearance	380 mm
Vertical Clearance	430 mm
Max. Piston Stroke	50 mm
Power Input	230 V , 1 Ph, 50 Hz.
Machine Weight	950 kG

*Note: Specifications are subject to change, Photos shown above are Indicative, Actual Product can Vary.*



Export Sales: +91-9829132777  
 India Sales: +91-9588842361



IT-2013, Ramchandrapura Industrial Area,  
 Sitapura Extension, Jaipur-302022, India.



info@tesca.in  
 www.tescaglobal.com