


- Digital Clamp Meter in 3½ digit LCD display incorporating latest technology.
- These clamp meters can measure AC Current, AC Voltage, DC Voltage, Resistance, Temperature and Frequency.
- Additional Features include Diode Test, Continuity check, Data Hold and Back light.
- These Clamp Meters are used in various industries across various sectors for maintenance and manufacturing.

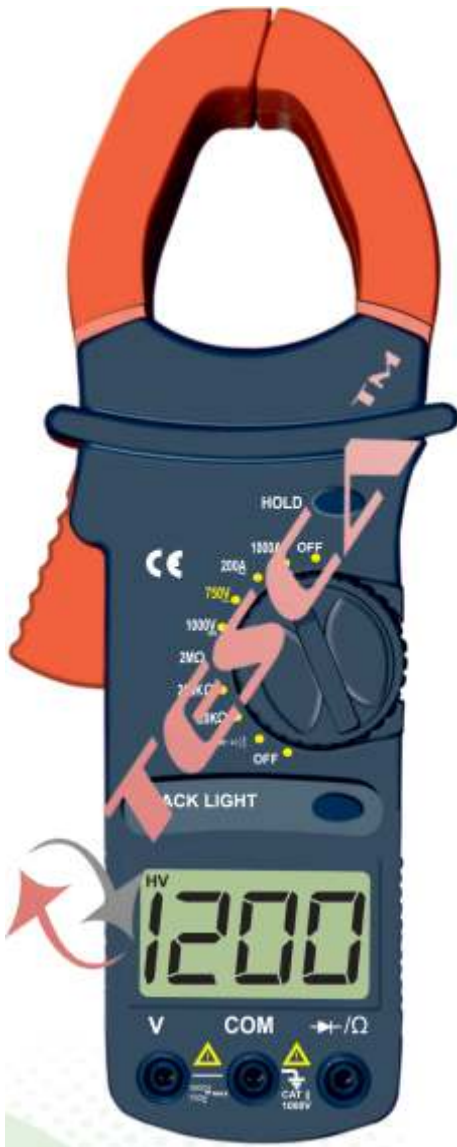

Model No:- 16967 / 16968 / 16969

FUNCTIONS	RANGE	BASIC ACCURACY		
		16967	16968	16969
Voltage DC	1000V	± (1.0% +2)		
Voltage AC	750V	± (1.2% +5)		
Ampere AC	20A-200A-1000A	± (2.0% +10)	—	—
	200A-1000A	—	± (2.0% +10)	
Resistance	200 -2K	± (1.0% +4)	—	—
	20K -2M	—	± (1.0% +4)	
	20K -200K -2M	—	—	± (1.0% +4)
Temperature	-40°C to 750°C	—	± (1.5% +15)	
	-50°F to 1400°F	—	—	
Frequency	20KHz	—	—	± (3.0% +5)
Diode Test	Yes	✓		
Continuity buzzer	Yes	✓		
Data hold	Yes	✓		
Power	9V Battery			
Size	245 x 90 x 45mm			
Weight	Approx. 360g			

Accessories with the Meter



Test Leads



**K-Type Thermocouple Lead
(With 16968 Only)**

Note: Specifications are subject to change.

Tesca Technologies Pvt. Ltd.

IT-2013, Ramchandrapura Industrial Area, Sitapura Extension,
Near Bombay Hospital, Vidhani Circle, Jaipur-302022, Rajasthan, India,
Tel: +91-141-2771791 / 2771792; Email: info@tesca.in, tesca.technologies@gmail.com
Website: www.tesca.in

